

Life Is On

Schneider
Electric

CONNECTED

 PriceList

Power Monitoring Solutions Metering Products

With effect from January 11th, 2021



se.com/in

1. Tailored Offers for Specific Applications and Segments	
1.1 HDPM6000 NEW	7
1.2 BCPM	7
1.3 Insulation Monitoring Devices.....	8
2. High Accuracy, Specialized Solutions - for MV/LV Distribution	
2.1 PowerLogic™ ION9000T NEW	10
2.2 PowerLogic™ ION9000	10
2.3 PowerLogic™ ION 8800 / 8650.....	10
2.4 PowerLogic™ ION7400	12
2.5 PowerLogic™ PM8000 Series	12
3. High Accuracy, Compact, Power Meters - for HV/MV/LV Distribution	
3.1 PowerLogic™ PM5000 Series Power Meters	14
3.2 Smart Demand Controller - EM7200 Series	14
3.3 EasyLogic™ PM2000 Series.....	16
4. India's Most Trusted, Reliable and Accurate Multifunction Meters	
4.1 Conzerv EM6400NG ⁺ Series, The Next Generation Workhorse.....	18
5. India's Most Trusted, Reliable and Accurate Multifunction Meters	
5.1 Hexa Series EM64XXH and PM1130H Meters	19
5.2 Hexa Series LCD Range: OEM Specialized applications. NEW	20
6. PowerTag - World's Smallest Energy Sensor	
6.1 PowerTag for MCB	22
6.2 PowerTag for MCCB.....	22
6.3 Smartlink.....	22
6.4 Communication Auxiliaries	23
7. DIN Rail Mount Meters - Accurate, Flexible Power Meters	
7.1 PowerLogic™ PM3200 Series CI 0.5S Power Meters MV / LV Distribution	24
7.2 PowerLogic™ iEM3000 Series Class Meters - LV Distribution	24
8. Ethernet Communication Gateways and Meters	
8.1 Ethernet Communication Gateway Server / Converters.....	25
8.2 Ethernet – TCP/IP Protocol Meters & Accessories	25
9. Specialized Small Form Factor Meters - ELF Series	
9.1 ELF32xx Series - VAF, Power & Energy Meters.....	26
10. Specialized Counter Energy Meters- Conzerv™ DM52xx	
10.1 Conzerv™ DM52xx.....	26
11. LCD Display Energy Meters & VAF+PF Meters	
11.1 EM1000 / EM1200 Series.....	26
11.2 DM 6100 Series – VAF, PF Meters.....	27
12. CE compliance - Volt/Amp/ frequency meter	
12.1 EasyLogic™ DM3000 / DM1000.....	27
13. Just the Basics - Voltage / Ampere / Frequency Meters	
13.1 Conzerv™ DM3000 / DM1000	27


Get ready for
GREEN
Avatar of Power Monitoring

Discover EM6400NG+
India's Most sold Multifunction Meter



EcoStruxure Power: thrive in a digital world.

Discover Our Power Monitoring Solutions

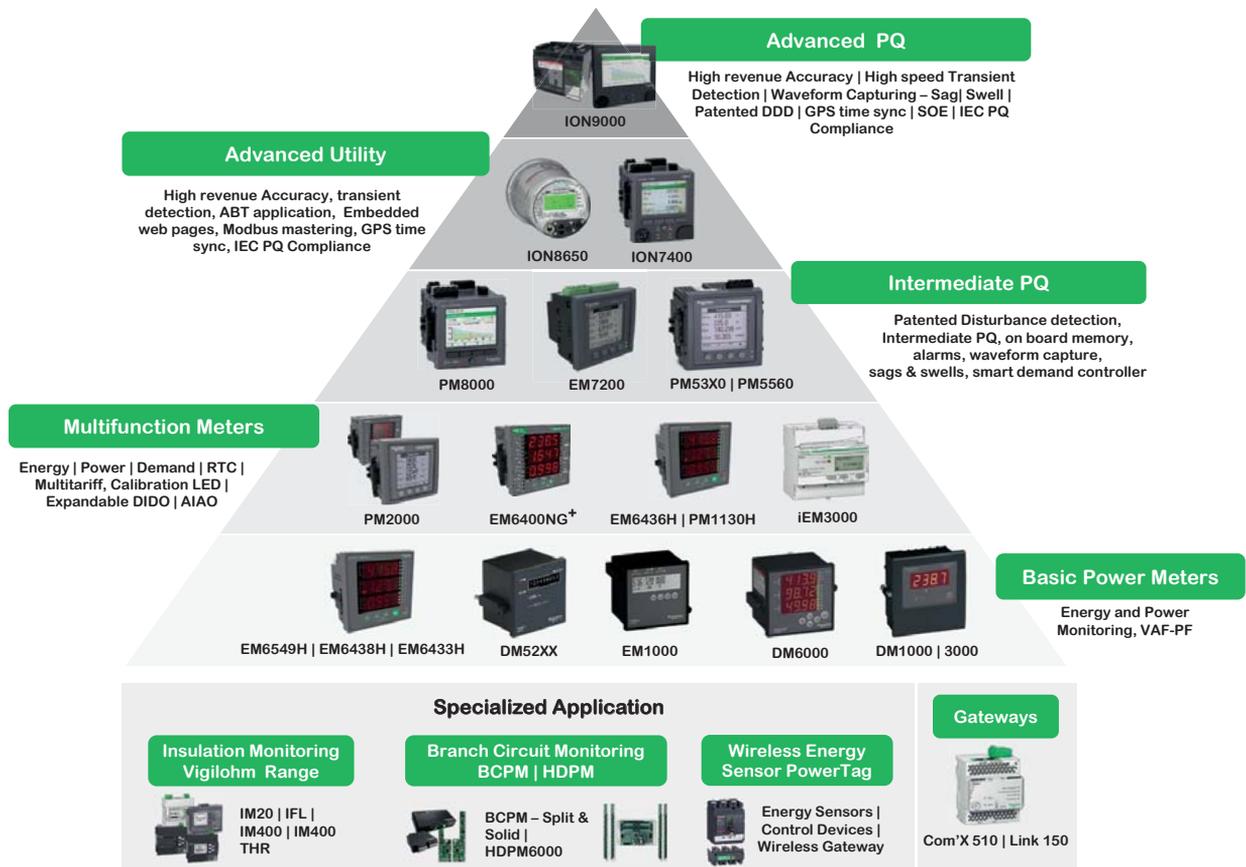

Gain new
INSIGHTS
into your
mission-critical facilities



Introducing HDPM6000

High density metering solutions for panelboards and busways in large and critical power applications



1. Tailored Offers for Specific Applications and Segments



1.1 HDPM6000 **NEW**

***Coming Soon**

Accurate and adaptable branch circuit metering

Asset management

- > Monitor up to 192 circuits
- > Identify increased harmonics in the rack servers to detect a potential failure (THD/circuit, waveform capture/circuit)

Robust communications

- > Support for MODBUS, SNMP, and BACnet TCP/IP

Cyber Security

- > Helps minimize vulnerabilities to critical power assets and systems and reinforce security strategy

Data logging


- > On-board memory for data logging
- > Meet the needs of robust code compliance applications

Modular and scalable

- > Simplified installation for reduced wiring issues
- > Adapts to expanding electrical networks
- > Scalable, future-proof capabilities

Panelboard or busway flexibility

- > Embedded web page for configuration and monitoring
- > Touch screen (optional) for data display
- > EcoStruxure™ Power integration

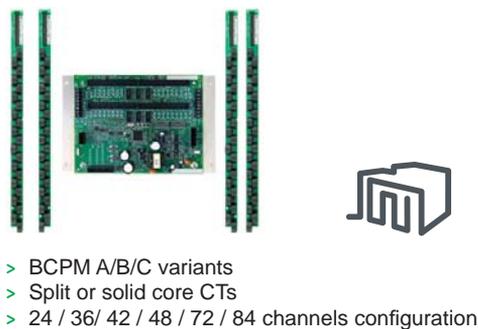

- > BCPM A/B/C variants
- > Split or solid core CTs
- > 24 / 36 / 42 / 48 / 72 / 84 channels configuration

1.2 BCPM

***Price On Request**

The BCPM Provides Data Center Managers with Information to

Maximize uptime and avoid outages through advanced alarming capabilities

- > Set sensitivity parameters so an alarm is triggered when current approaches any breaker limit
- > Alarms distinguish between past events and alarm states that are still occurring
- > Analyze the alarm history to assess areas that may need additional capacity to prevent issues

Effectively plan future infrastructure needs by providing historical usage data, to ensure that new infrastructure projects are sized correctly

- > Track usage at the circuit level
- > Develop reports on historical usage patterns
- > Use reporting to accurately predict future needs

Easily allocate costs

- > Allocate costs based on per rack energy consumption
- > Track usage patterns and determine areas of potential savings
- > Create ongoing reporting structures to effectively manage costs

1. Tailored Offers for Specific Applications and Segments



1.3 Insulation Monitoring Devices

*Price On Request

Vigilohm Range of Insulation Monitoring Devices

Used in IT earthing arrangements, this solution

- > Guarantees process continuity in case of earth fault,
- > Improves staff and process safety, and
- > Optimizes maintenance.

Can be used in 3 levels of insulation monitoring

Level 1 : fault detection and signalling, manual fault location (all IMDs)

Level 2 : automatic fault location

Level 3 : feeder measurement + communication

Key features

- > Fault detection and signalling
- > Insulation resistance value display
- > Transformer monitoring (current and temperature)
- > Modbus communication
- > Alarm log
- > Insulation fault remote indicator (audible & visual)
- > Electrical fault (transformer overload or circuit breaker tripping) remote indicator (audible & visual)
- > IEC 60364-4-41 : Electrical standards in buildings
- > IEC 60364-7-10 : Requirements for special installations or locations
Medical locations.
- > IEC 61557-8 : Insulation Monitoring Devices in IT earthing arrangement
- > IEC 61557-9 : Equipment for insulation fault location in IT earthing arrangements



Hospital

Marine

O&G

Nuclear

Airport

MMM



High-speed transient detection for your critical power networks

PowerLogic™ ION9000T

Meet the storyteller of your critical power networks - the PowerLogic ION9000T power quality meter. With high-resolution transient waveform capture, the meter identifies and characterizes high-speed transient voltages that often go undetected and can cause component damage or equipment failure. Modular design, flexible programming, and 0.1S accuracy give the ION9000T the adaptability needed for the IoT-enabled future. Onboard web pages provide meaningful, actionable EN50160 and IEEE519 power quality compliance data. The meters work natively with Ecostruxure™ Power Monitoring Expert to correlate facility-wide, system-level events for decisive power quality information and root cause analysis.

High-speed transient detection

- Detection and capture of impulsive and oscillatory transients along with onboard power quality analysis
- Transient and disturbance waveform captures, ½ cycle RMS
- Patented disturbance direction detection (DDD) to identify event root cause

Modular, flexible, and adaptable

- Multiple mounting options: DIN and panel with adapter plate
- Calibration pulses: on meter body
- Native plug-and-play support: for Ecostruxure™ Power Monitoring Expert, Ecostruxure™ Power SCADA Operation, ION Setup
- Two display options and field installable I/O option modules

Unprecedented accuracy

- 0.1S accuracy: third-party certified, for a new benchmark in high performance metering
- Certified PQI-A (power quality instrument): complies with IEC 62586-1/-2
- Can uncover energy savings and contribute to a new competitive edge
- Ideal for even the most demanding environments

Cybersecurity features

- Secure protocol support and security event logging that integrate with your architectures
- Helps minimize vulnerabilities to your critical power assets and systems and reinforce your security strategies

2. High Accuracy, Specialized Solutions - for MV/LV Distribution



2.1 PowerLogic™ ION9000T NEW

*Price On Request

- > High-speed transient detection with 10 MHz sampling, ability to measure up to 10 kV peak
- > Patented disturbance direction detection to identify event root cause
- > Unprecedented accuracy of 0.1S accuracy
- > Certified PQI-A (power quality instrument) complies with IEC 62586-1/-2
- > Modular, flexible, and adaptable
- > Secure protocol support and security event logging.
- > Onboard power quality analysis. Complies with: IEC61000-4-30 class A, IEC62586-1 / IEC62586-2, and verified by third-party lab certifications
- > Extended waveform capture
- > High-speed RMS data capture for in-depth analysis of any PQ disturbance
- > Smart power event analysis
- > ION programmability technology allowing tremendous flexibility
- > Protects your infrastructure investment now and in the future
- > Green Premium eco-mark.
- > Makes your power network safer, more reliable, efficient, and compliant.



2.2 PowerLogic™ ION9000 *Price On Request

*Price On Request

- > Summarize power quality, set targets, measure and verify results
- > Large Color Display with high resolution
- > Modbus Master functionality to read from downstream Modbus devices and view it via the front panel
- > Detect and capture transients as short as 20µs at 50Hz (17µs at 60 Hz)
- > Power quality compliance monitoring IEC 61000-4-30 Class A , test methods as per IEC 62586-1/2.
- > 2 GB of standard non-volatile memory.
- > Trend curves and short-term forecasting of upcoming values for better decisions
- > Disturbance direction detection with results captured in the event log, with a timestamp and certainty level
- > 50+ definable alarms to log critical event data, trigger waveform recording, or perform control function.
- > Trigger on any condition, with 1/2-cycle and 1-second response time.
- > Support protocol: Modbus, ION, DNP3, DLMS, SNMP, and IEC 61850.
- > Gateway functionality to access downstream meter's readings through ethernet
- > Time synchronization via GPS clock (RS-485) or IRIG-B (digital input) to ±1 millisecond.



Utility/ABT meter



8650

2.3 PowerLogic™ ION 8800 / 8650 DLMS

*Price On Request

- > **Utility grade accurate metering** with IEC 62053-22/23 Class 0.2S with 1024 samples / cycle
- > **Power quality compliance monitoring** for IEC 61000-4-30 Class A/S, EN50160, IEC 61000-4-7, IEC 61000-4-15, IEEE 1159, IEEE 519
- > **Power quality measurements** with Individual Harmonics, sag – swell, transient detection, waveform analysis & logging
- > **Digital fault recording** by capturing voltage and current channels simultaneously for sub-cycle disturbances
- > **Complete communications** through IEC1107 optical port or the optional communications module that supports concurrent Ethernet, serial, and modem communications
- > **Transformer/line loss compensation** for system losses in real time directly in the meter
- > **Instrument transformer correction** to save money and improve accuracy by correcting for less accurate transformers.

The most versatile meter for your feeder applications



PowerLogic ION7400

- Compact, 3-phase multifunction energy and power quality compliance meters
- Flexible and modular, with object-oriented intelligence
- Accurate, precise, and highly adaptable

se.com/in

2. High Accuracy, Specialized Solutions - for MV/LV Distribution



2.4 PowerLogic™ ION7400

Compact energy and power quality meters for feeders or critical loads

*Price On Request

- > High quality, reliability, and accuracy: 3-phase power and energy measurements with power quality compliance monitoring, data and event logging, and alarming
- > Industry-leading: Class 0.2 revenue metering and network management data
- > Regulatory compliance: meets all North and South American requirements for utility metering
- > Built-in intelligence: RTU polls downstream devices like relays or other telemetry devices
- > Exceptional adaptability: integrates into existing billing/SCADA systems
- > Reduces downtime: pinpoints disturbances with disturbance direction detection as upstream or downstream of the meter
- > High degree of visibility to data and assets: allows for cost savings, rapid response time, and better decisions
- > Monitors and logs parameters in support of multiple international PQ compliance measurement standards
- > Harmonics: high-resolution waveform capture and Flicker influence



2.5 PowerLogic™ PM8000 Series

*Price On Request

- > Patent disturbance detection capability with Sag/Swell / Waveform capture technology
- > **Ideal** for high energy users
- > **Revenue accuracy** of Class 0.2S as per IEC 62053-22
- > **High Sampling rate** of 256 Samples / Cycle, Waveform recording, sag/swell monitoring
- > **Modbus Master** with Single RS485 port & Dual Ethernet
- > **512MB of standard** non-volatile memory for Data and event logging
- > **Harmonics Analysis** upto 63rd for Voltage & current
- > **GPS clock (RS485)** or IRIG-B (digital input)
- > **01 Serial port** (Modbus, ION, DNP3) , Dual Ethernet port (Modbus/TCP, ION TCP, DNP3 TCP, IEC 61850)
- > **Standard Digital Input**, Expandable Digital IO, Analog IO

Simplifying power quality, maximizing versatility

PowerLogic™ PM8000 series Power Quality Analyser

- Higher Sampling Rate: 256 Samples / Cycle
- Disturbance Direction Detection (DDD): Upstream / Downstream
- Sag/ Swell monitoring with Waveform Capturing functionality
- High Active Accuracy: Class 0.2S as per IEC 62053-22
- Dual Ethernet and 01 RS485 port with Modbus Mastering
- International PQ standards - IEC 61000-4-30 Class S, IEC 62586 PQI-S



3. High Accuracy, Compact, Power Meters - for HV/MV/LV Distribution



3.1 PowerLogic™ PM5000 Series Power Meters

- > **IEC 61557-12 IEC** for PMD (Power Measurement Devices)
- > **Accuracy** - Class 0.5S (PM51xx, PM53xx) and Class 0.2S (PM5560) - IEC Specifications
- > **4th CT** for neutral and ground current measurement (PM5560)
- > **Dual Ethernet** ports for daisy chain communication (PM5560)
- > **Internal** webpage (PM5560)
- > **Individual Harmonics** up-to 63rd (PM5560), 31st (PM53xx) & 15th (PM51xx) THD, TDD
- > **Multi-tariff** Schedules 4 tariffs (PM53xx) & 8 tariffs (PM5560)
- > **Two Relay outputs** for circuit breaker monitoring & control (PM5330, PM5340)
- > **Logging** memory (PM53xx, PM5560)
- > **Peak demand** with time stamping D/T for current and powers (PM53xx, PM5560)
- > **Demand prediction** based on sliding, fixed and rolling block, thermal methods (All models)
- > **Battery backed up** Real Time Clock (All models)
- > **Meter Insight-Through QR code**
- > 2DI/2DO/2AI (PM5570), RCM (PM5660), Waveform capture and Sag Swell + 2DI/2DO (PM5650), Waveform capture and Sag Swell + 2DI/2DO + RCM (PM5760)

Product	Description	Reference	Unit MRP [₹]
PM 5560	CI0.2S, 2 Ethernet + 1 RS485 Port, 4th CT, Webpage, 63rd Harmonic (magnitude & direction), 52 alarms, 4 DI, 2 DO, 8 multi tariff, 128 samples / cycle	30003008D	61749
PM 5340	CI0.5S, 1 Ethernet, 31st harmonic, 2 DI, 2 DO, 2 RO, 35 Alarms, Data logging, 64samples / cycle	30003007D	36118
PM 5320	CI0.5S, 1 Ethernet, 31st harmonic, 2 DI, 2 DO, 35 Alarms, Data logging, 64samples / cycle	30003005D	33664



3.2 Smart Demand Controller - EM7200 Series

- > Accuracy **CL 0.2***, **0.5S** and **Class 1.0** as per IEC 62053 21/22
- > **CE / UL** Certification as per IEC / UL61010 1 Ed 3
- > Versatile and fully user programmable, suitable for HT/LT with any CT/PT
- > 2 Digital inputs, **3 Form C Relay outputs** for control
- > **TOU** for time enabled tariff users and auto resetting of energy parameters - weekdays, weekends, public holidays & offs.
- > **Import / Export** option enables monitoring of bi-directional power flow (also called 4 - quadrant measurement)
- > Utility meter cross check
- > **19 demand profile** settings for optimal demand planning
- > THD and individual harmonics up-to 15th
- > **Predictive demand**, present demand, max demand with date/time stamp, 4 peaks and 4 lows

Product	Description	Reference	Unit MRP [₹]
EM 7290	Demand Controller CI0.2* with RS485 Port	30002975	50821
EM 7280	Demand Controller CI0.5S with RS485 Port	30002198	39645
EM 7230	Demand Controller CI1 with RS485 Port	30002055	36594

* Class 0.2S compliance available in 3ph,4w system

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 11th, 2021



THE PULI
HOTEL AND SPA

The easy choice for quality,
value, and simplicity.

EasyLogic™ PM2000 series



- Active Accuracy - Class 0.5S/1.0 as per IEC62053-22/21
- Dual Sourcing - Utility or Solar or wind energy monitoring using the DI
- 12am (Configurable) Snapshot - Volt, Amp, Power & Energy
- Rate Counters - Configurable for Energy and KgCO2
- Expandable IO Module - Digital IO/Analog IO
- Calibration and Heart beat LED on the front display

se.com/in

3. High Accuracy, Specialized Solutions- for MV/LV Distribution

3.3 EasyLogic™ PM2000 Series

Multifunction Power and Energy meter with 12am snapshot and Rate counters (kgCO2 / Energy)



- > Energy Standard - Class 0.5S /1.0 as per IEC 62053-22 / 21
- > Power quality analysis with THD & Ind. harmonics up to 31st
 - IO module integration (optional) – Digital Input/ Output, Analog Input/ Output
 - Dual / Multi sourcing - Capable of monitoring Utility & Genset/ Solar/Wind energy using the Multitariff and Digital Input.
 - 12am (Configurable) Snapshot – Snapshot of Avg Volt, Avg Amp, Total active power & energy delivered as measured by the meter at 12am (Configurable) of every day.
 - Rate Counters – Configurable rate counters for displaying kgCO2 or energy cost.
 - Onboard Data Logging – Configurable logging up to 2 parameters
 - Per-phase, avg/ total of Volts, Amps, PF, THD, Hz, W, Wh, VA, VAh, VAR, VARh, Max Demand & Import / Export
 - Min/Max Monitoring with Date/Time stamping
 - Communication : Pulse output or RS485 port

Product	Description	Reference	Unit MRP [₹]
PM2230	PM2230, LCD, RS485, Accuracy Cl0.5S, 31st Ind.harmonics, 12am snap shot, kg CO2 and energy rate counters, Data logging	METSEPM2230D	25124
PM2220	PM2220, LCD, RS485, Accuracy Cl1, 15th Ind.harmonics, 12am snap shot, kg CO2 and energy rate counters	METSEPM2220D	23113
PM2130	PM2130, LED, RS485, Accuracy Cl0.5S, Ind. Harmonics up to 31st over communication, data logging	METSEPM2130D	24064
PM2K2DIDO*	Optional Digital IO card - 2 channel DI & DO for PM2000 Series	METSEPM2KDGTLIO22D	2855
PM2K1AIAO*	Optional Analog IO card - 1 channel AI & AO for PM2000 Series	METSEPM2KANLGIO11D	3385
PM2K2AIAO*	Optional Analog IO card - 2 channel AI & AO for PM2000 Series	METSEPM2KANLGIO22D	4124
PM2K2DI2RO*	EasyLogic™ PM2x30 2DI2RO Module 2-IO	METSEPM2K2DI2ROD	Price On Request

* Optional IO modules can be used for PM2230 & PM2130 models only. Maximum upto 1 module can be used per device at a time.

The future of multifunction meters is here

The all-new Hexa Series and EM6400NG⁺ Series

All-New Hexa Now in LCD



All-New Hexa



All-New EM6400NG⁺



4. India's Most Trusted, Reliable and Accurate Multifunction Meters



4.1 Conzerv™ EM6400NG+ Series, The Next Generation Workhorse

Multifunction Energy meter with NextGen features like Harmonics & Min/Max Monitoring, Digital security

- > **Energy Standard** – Class 0.2/0.5S/1 as per IEC 62053-22 / 21
- > **Power quality analysis** with THD & individual harmonics upto 15th over communication
- > **13 different wiring** configuration scheme
- > **Volts, Amps, PF, THD, F, W, Wh, VA, VAh, Var, Varh, Runhrs, Onhrs, Interupts, Preloaded Demand & Import /Export**
- > **Min/Max Monitoring** with Date/Time stamping
- > **Calibration LED** and Heart beat LED for communication Status
- > **Communication:** POP or RS485 port

Product	Description	Reference	Unit MRP [₹]
EM6400NG+	Class accuracy C10.2, RS485 port	METSEEM6400NGRSCL2	27529
EM6400NG+	Class accuracy C10.5S, RS485 port	METSEEM6400NGRSCL5	22219
EM6400NG+	Class accuracy C11.0, RS485 port	METSEEM6400NGRSCL1	<input checked="" type="checkbox"/> 17538
EM6400NG+	Class accuracy C10.5S, POP	METSEEM6400NGPOCL5	15193
EM6400NG+	Class accuracy C11.0, POP	METSEEM6400NGPOCL1	<input checked="" type="checkbox"/> 13755

Old EM6400 Reference	Equivalent EM6400NG+ Reference
30002021	METSEEM6400NGPOCL1
30002065	METSEEM6400NGPOCL1
30002072	METSEEM6400NGPOCL1
30002081	METSEEM6400NGPOCL1
30002022	METSEEM6400NGPOCL5
30002034	METSEEM6400NGPOCL5
30002049	METSEEM6400NGPOCL5
30002050	METSEEM6400NGPOCL5
30002064	METSEEM6400NGPOCL5
30002085	METSEEM6400NGPOCL5
30002088	METSEEM6400NGPOCL5
30002002	METSEEM6400NGRSCL1
30002012	METSEEM6400NGRSCL1
30002077	METSEEM6400NGRSCL1
30002078	METSEEM6400NGRSCL1
30002246	METSEEM6400NGRSCL1
30002027	METSEEM6400NGRSCL2
30002066	METSEEM6400NGRSCL2
30002089	METSEEM6400NGRSCL2
30002097	METSEEM6400NGRSCL2
30002101	METSEEM6400NGRSCL2
30002102	METSEEM6400NGRSCL2
30002104	METSEEM6400NGRSCL2
30002106	METSEEM6400NGRSCL2
30002109	METSEEM6400NGRSCL2
30002257	METSEEM6400NGRSCL2
30002347	METSEEM6400NGRSCL2
30002911	METSEEM6400NGRSCL2

Old EM6400 Reference	Equivalent EM6400NG+ Reference
30002912	METSEEM6400NGRSCL2
30002913	METSEEM6400NGRSCL2
30002914	METSEEM6400NGRSCL2
30002915	METSEEM6400NGRSCL2
30002916	METSEEM6400NGRSCL2
30002917	METSEEM6400NGRSCL2
30002918	METSEEM6400NGRSCL2
30002919	METSEEM6400NGRSCL2
30002920	METSEEM6400NGRSCL2
30002921	METSEEM6400NGRSCL2
30002922	METSEEM6400NGRSCL2
30002923	METSEEM6400NGRSCL2
30002924	METSEEM6400NGRSCL2
30002925	METSEEM6400NGRSCL2
30002001	METSEEM6400NGRSCL5
30002019	METSEEM6400NGRSCL5
30002036	METSEEM6400NGRSCL5
30002040	METSEEM6400NGRSCL5
30002041	METSEEM6400NGRSCL5
30002042	METSEEM6400NGRSCL5
30002051	METSEEM6400NGRSCL5
30002056	METSEEM6400NGRSCL5
30002057	METSEEM6400NGRSCL5
30002069	METSEEM6400NGRSCL5
30002082	METSEEM6400NGRSCL5
30002083	METSEEM6400NGRSCL5

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 11th, 2021

5. India's Most Trusted, Reliable and Accurate Multifunction Meters



5.1 Hexa Series EM64XXH and PM1130H Meters Load Managers, Power & Energy, Dual Source Multifunction meters

- > Energy Accuracy - Class 0.5 / 1.0 as per IEC 62053-22 / 21
- > Single and Multisource range of devices
- > Dual Sourcing with demand Monitoring, THD% for voltage & Current, 01 Relay Contact.
- > Configurable Favorite Page.
- > Sampling Rate of 32 Samples / Cycle.
- > Onsite Calibration Verification - Calibration LED.
- > Heart beat LED for communication status & meter healthiness.
- > Modus RS485 communication port.
- > Communication Disable from the front panel of the Meter.
- > Multi colored analog load bar with over load indication.
- > Configurable Password for secured setup of the device.

Product	Description	Reference	Unit MRP [₹]
PM1130H	EASYLOGIC™ PM1130H Dual Source Power & Energy Meter, Class accuracy 0.5, 01 Relay Contact, 01 RS485 port	METSEPM1130HCL05RD	15716
EM6438H	CONZERV™ EM6438H Dual Power & Energy Meter, Class accuracy 0.5, 01 RS485 port	METSEEM6438HCL05RS	7719
EM6438H	CONZERV™ EM6438H Dual Power & Energy Meter, Class accuracy 1.0, 01 RS485 port	METSEEM6438HCL10RS	<input checked="" type="checkbox"/> 7166
EM6436H	CONZERV™ EM6436H VAF+ PF + Power & Energy Meter, Class accuracy 0.5, 01 RS485 port	METSEEM6436HCL05RS	11547
EM6436H	CONZERV™ EM6436H VAF+ PF + Power & Energy Meter, Class accuracy 1.0, 01 RS485 port	METSEEM6436HCL10RS	<input checked="" type="checkbox"/> 10059
EM6436H	CONZERV™ EM6436H VAF+ PF + Power & Energy Meter, Class accuracy 1.0	METSEEM6436HCL10NC	8606
EM6433H	CONZERV™ EM6433H A+ Power & Energy Meter, Class accuracy 0.5, 01 RS485 port	METSEEM6433HCL05RS	7159
EM6433H	CONZERV™ EM6433H A+ Power & Energy Meter, Class accuracy 1.0, 01 RS485 port	METSEEM6433HCL10RS	<input checked="" type="checkbox"/> 6744
EM6459H	CONZERV™ EM6459H VAF+ PF Digital Meter, Class accuracy 0.5, 01 RS485 port	METSEEM6459HCL05RS	7606
EM6459H	CONZERV™ EM6459H VAF+ PF Digital Meter, Class accuracy 1.0, 01 RS485 port	METSEEM6459HCL10RS	<input checked="" type="checkbox"/> 7135
EM6459H	CONZERV™ EM6459H VAF+ PF Digital Meter, Class accuracy 1.0	METSEEM6459HCL10NC	5573

Old EM64xx Reference	Equivalent Hexa Reference
30002277	METSEPM1130HCL05RD
30002278	METSEPM1130HCL05RD
30002306	METSEPM1130HCL05RD
30002351	METSEPM1130HCL05RD
30002438	METSEPM1130HCL05RD
30002305	METSEPM1130HCL05RD
30002437	METSEPM1130HCL05RD
30002026	METSEEM6438HCL10RS
30002269	METSEEM6438HCL05RS
30001999	METSEEM6436HCL10RS
30002892	METSEEM6436HCL10RS
30001994	METSEEM6436HCL10NC
30002295	METSEEM6436HCL10NC
30002893	METSEEM6436HCL10NC
30002015	METSEEM6436HCL05RS
30002203	METSEEM6436HCL05RS
30002204	METSEEM6436HCL05RS
30002205	METSEEM6436HCL05RS
30002201	METSEEM6436HCL05RS

Old EM64xx Reference	Equivalent Hexa Reference
30002930	METSEEM6436HCL05RS
30002931	METSEEM6436HCL05RS
30002932	METSEEM6436HCL05RS
30002933	METSEEM6436HCL05RS
30002016	METSEEM6433HCL10RS
30002031	METSEEM6433HCL10RS
30002000	METSEEM6433HCL05RS
30002336	METSEEM6433HCL05RS
30002436	METSEEM6433HCL05RS
30002926	METSEEM6433HCL05RS
30002927	METSEEM6433HCL05RS
30001804	METSEEM6459HCL10RS
30002008	METSEEM6459HCL10NC
30002220	METSEEM6459HCL05RS
30002221	METSEEM6459HCL05RS
30002224	METSEEM6459HCL05RS
30002934	METSEEM6459HCL05RS
30002935	METSEEM6459HCL05RS
30002936	METSEEM6459HCL05RS

* Few references may not be the exact equivalent, Please contact local sales representative before ordering.

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 11th, 2021

5. India's Most Trusted, Reliable and Accurate Multifunction Meters



5.2 Hexa Series LCD Range: OEM Specialized applications

EasyLogic™ EM1220H | PM1225H | PM1230H meters are ideal replacements for multiple analog meters for stand-alone metering in OEM Panel Boards, Genset panels, Motor Control Centers, power factor improvement panels

- > **Energy Accuracy** - Class 0.5 / 1.0 as per IEC 62053-22 / 21
- > Single and Multisource range of devices
- > Power quality analysis (THD %) | Phase angle between the voltage and current
- > **LCD display:** Elegant single row, bright back lit graphical LCD display 132 * 32 pixels, Fast in-line view, three parameters name and value at one glance
- > **Suppression current:** To disregard the measurement of induced and panel auxiliary load current in the circuit (settable from 5 to 99 mA).
- > **Protective cover:** Tamper-proof terminal screws do not detach from housing.
- > **Control power options:** Universal range 44 to 300V LN AC/DC or Low voltage DC control power option of 9 to 36V DC
- > Sampling Rate of 32 Samples / Cycle
- > Onsite Calibration Verification - Calibration LED
- > Heart beat LED for communication status & meter healthiness.
- > Modbus RS485 communication port
- > Communication Disable from the front panel of the Meter
- > Configurable Password for secured setup of the device
- > **Smart line indicators in LCD display meter:** Helps check the presence of input supply voltage

Product	Description	Reference	Unit MRP [₹]
PM1230H	EasyLogic™ PM1230H Dual Source Power & Energy, Class Accuracy 0.5, 01 RS485 Port	METSEPM1230HCL5	14148
PM1225H	EasyLogic™ PM1225H Restricted MFM Meter, Class Accuracy 0.5, 01 RS485 Port	METSEPM1225HCL5	19997
PM1225H	EasyLogic™ PM1225H Restricted MFM Meter, Class Accuracy 1.0, 01 RS485 Port	METSEPM1225HCL1	15784
EM1220	EasyLogic™ EM1220H Load Manager, Class Accuracy 0.5, 01 RS485 Port	METSEEM1220HCL5	10623
EM1220	EasyLogic™ EM1220H Load Manager, Class Accuracy 1.0, 01 RS485 Port	METSEEM1220HCL1	9254

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 11th, 2021

Stay on top of it
with **PowerTag**



Give your business a competitive edge with PowerTag wireless energy sensors

With PowerTag Energy, you can add innovation to any project with one simple action. Even in panels where space is at a premium, you can easily tag circuit breakers up to 630 A to help your customers reduce costs and improve efficiency. As a connected product, PowerTag Energy is a key part of ExoStruxure Power – Schneider Electric's IoT-enabled, open and interoperable architecture. And a small-but-impressive solution your customers will appreciate.

Part of **PowerLogic**

se.com/poweritag



* Secure it: As part of the Acti 9 communication system, PowerTag monitors loads and identifies load imbalances and overload levels before a trip occurs. PowerTag also alerts you to voltage losses, so you save time recovering your installation in the event of load downtime. An email alert means you can take preventive action thus avoiding potential downtime. © 2020 Schneider Electric. All Rights Reserved. Life Is On Schneider Electric is a trademark and the property of Schneider Electric SE, its subsidiaries and affiliated companies. 998-20959054_GMA_630A_image63A_PanelBuilder_print.ad.indd

6. PowerTag - World's Smallest Energy Sensor



6.1 PowerTag for MCB

Monitor Your Energy

- > Real time U, V, I, P, PF
- > Active energy metering (Class 1 EN 61557-12) partial and total
- > Load balance overview for 3P

Improve your Maintenance

- > Pre Alarm on overload
- > Specific "alarms" for U, I, P
- > Alarm on feeder voltage loss

Product	Description	Reference	Unit MRP [₹]
PowerTag	PowerTag Energy M63 1P+W	A9MEM1520	7802
PowerTag	PowerTag Energy M63 1P+N Top	A9MEM1521	7802
PowerTag	PowerTag Energy M63 1P+N Bottom	A9MEM1522	7802
PowerTag	PowerTag Energy M63 3P	A9MEM1540	15749
PowerTag	PowerTag Energy M63 3P+N Top	A9MEM1541	15749
PowerTag	PowerTag Energy M63 3P+N Bottom	A9MEM1542	15749
PowerTag	PowerTag Energy F63 1P+N	A9MEM1560	8573
PowerTag	PowerTag Energy F63 3P+N	A9MEM1570	17166
PowerTag	PowerTag Energy Sensor 63A -3P/3P+N	A9MEM1573	16349
PowerTag	PowerTag Energy Sensor 160A -F160 - 3P/3P+N	A9MEM1580	21111
PowerTag	PowerTag Energy Sensor Rope 200A - R200 - 3P/3P+N	A9MEM1590	39556
PowerTag	PowerTag Energy Sensor Rope 600A - R600 - 3P/3P+N	A9MEM1591	41330
PowerTag	PowerTag Energy Sensor Rope 800A - R1000 - 3P/3P+N	A9MEM1592	44180
PowerTag	PowerTag Energy Sensor Rope 2000A - R2000 - 3P/3P+N	A9MEM1593	46318



6.2 PowerTag for MCCB

- > Can also be installed in existing panels, designed to enhance the monitoring of your electrical assets
- > Simplifies the connectivity of individual breakers to a Building Management System (BMS) along with ease of installation
- > Visualize in real-time on your Smartphone or PC

Product	Description	Reference	Unit MRP [₹]
PowerTag	ENERGY SENSOR POWERTAG NSX - 250A 3P	LV434020	27066
PowerTag	ENERGY SENSOR POWERTAG NSX - 250A 3P+N	LV434021	29664
PowerTag	ENERGY SENSOR POWERTAG NSX - 630A 3P	LV434022	46781
PowerTag	ENERGY SENSOR POWERTAG NSX - 630A 3P+N	LV434023	51237



6.3 Smartlink

- > Compliance to IEC/EN 61131-2
- > Protection Monitoring – Device Status and alarm notifications
- > Load Control / Switching through Contactors and Impulse Relays
- > Energy Monitoring through pulse meters
- > Alarm over email and analog sensors (temperature / humidity) with Smartlink Ethernet
- > Plug & Play – Pre fabricated cables and in built web pages
- > Rated Voltage: 24V DC

Product	Description	Reference	Unit MRP [₹]
Smartlink	Smartlink Modbus	A9XMSB11	37491
Smartlink	Smartlink SI-D	A9XMWD20	21993
Smartlink	Smartlink SI-B	A9XMZA08	42171

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 11th, 2021

6. PowerTag - World's Smallest Energy Sensor (cont.)

6.4 Communication Auxiliaries

Description	Reference	Unit MRP [₹]
Mounting Kit for Din Rail	A9XMFA04	1533
Prefabricated Cables M	A9XCAM06	5662
Locking Clips for Multiclip 80	A9XMLA02	668
Connectors 5 Pin	A9XC2412	7800
Prefabricated Cables L	A9XCAL06	6439
Prefabricated Cables S	A9XCAS06	5606
SEMI - Prefabricated Cables U	A9XCAU06	3870

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 11th, 2021

7. DIN Rail Mount Meters - Accurate, Flexible Power Meters

Schneider Electric's new DIN rail mount meters are compact, versatile, high performance devices that confirm to exacting IEC standards with the added benefits of being i. Easy to install ii. Easy to modify and iii. Easy to maintain



7.1 PowerLogic™ PM3200 Series CI 0.5S Power Meters MV / LV Distribution

- > **Know network health through** all measurement parameters (I, In, U, V, PQS, E, PF, Hz, THD)
- > **Four-quadrant metering to differentiate energy**
 - Target green technologies (delivered/received)
 - Help reduce utility penalties (active/reactive)
- > **Up to 4 different time slots to manage multiple tariffs**
 - Peak, off-peak, workday, weekend
- > **DI/DO provide access to other areas of the electrical network & allow for more applications**
 - WAGES counting, remote reset, tariff control and energy pulse outputs
 - status input (circuit breaker trip or panel door opening), DO alarm for sound or light alert
- > **Data logging (PM3255)**
 - Save last 32 days, last 20 weeks and last 13 months consumption data in separate registers
 - Longer historical record helps create an accurate load profile, making benchmarking and trending easier

Product	Description	Reference	Unit MRP [₹]
PM 3255	Din rail Power meter Modbus	METSEPM3255	17215
PM 3210	Din rail Power meter pulse	METSEPM3210	15688

7.2 PowerLogic™ iEM3000 Series Class Meters - LV Distribution



iEM31xx: 63A direct connect - CI1.0
iEM32xx: 1A / 5A CT connect - CI0.5S
iEM33xx: 125A direct connect - CI1.0

iEM3110
iEM3210
iEM3310

- > Total kWh
- > Partial kWh + date and time of last reset
- > Pulse output up to 1000pulse/kWh
- > 1 Digital Out
- > Date and time of last reset
- > MID legal metrology certification

iEM3150
iEM3250
iEM3350

- > Modbus
- > Total kWh
- > Partial kWh + date and time of last reset
- > Self powered
- > By communication: kWh, A, V, kW, PF

iEM3165, 3175
iEM3265, 3275

- > Total kWh, kVAR
- > Four quadrant
- > Partial kWh+ date and time of last reset
- > By communication: kWh, kVAh, P,Q, S, Kv, PF, 4 tariffs, digital input status, date/clock
- > 1 DI for circuit breaker status, input WAGES, 1 DO

iEM 33xx - CI1.0 , Direct current 125 A , Din Rail Meter

Product	Description	Reference	Unit MRP [₹]
iEM33xx	Three Phase, 125A Direct Current, Lonwork	A9MEM3375	22575
iEM33xx	Three Phase, 125A Direct Current, BACnet	A9MEM3365	20979
iEM33xx	Three Phase, 125A Direct Current, Modbus	A9MEM3350	17851
iEM33xx	Three Phase, 125A Direct Current, PulseO/P	A9MEM3310	16842

Three phase CT Operated, Din Rail Meter / Direct Current-Three phase (upto 63A)

Product	iEM 32xx CI0.5S CT		iEM 31xx CI1.0 - Direct current	
	Reference	Unit MRP [₹]	Reference	Unit MRP [₹]
iEM 3x65	A9MEM3265	18185	A9MEM3165	17643
iEM 3x55	A9MEM3255	12746	A9MEM3155	14083
iEM 3x50	A9MEM3250	11952	A9MEM3150	13292
iEM 3x10	A9MEM3210	10949	A9MEM3110	12168

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 11th, 2021

8. Ethernet Communication Gateways and Meters



Com'X 510 Energy management in a box

- > Com'X 510 collects and stores consumption of WAGES (water, air, gas, electricity and steam) and environmental factors like temperature, humidity, and CO2 levels.
- > Its embedded energy management software provides immediate visibility of energy consumption that helps identify opportunities for saving energy and lowering power bills.
- > Users can analyze real-time and historical data, provide stakeholders with a comprehensive view of their energy usage.

8.1 Ethernet Communication Gateway Server / Converters

Com'X 510 Gateway Server



- > Dual Ethernet
- > Onboard storage
- > Wireless WiFi / GPRS Support
- > Cloud hosted platform
- > Local and Customized Web pages with trending and dashboard visualization
- > Modbus Gateway
- > On-Board 6 DI, 2 AI

LINK150 Protocol Converter



- > Protocol Converter from Modbus RS485 to TCP/IP
- > Two (2) Ethernet ports for daisy chain Ethernet
- > Setup through built-in web pages
- > HTTP, HTTPS, FTP, SMTP, IPV6 Support
- > 24V DC and/or POE power supply

Product	Description	Reference	Unit MRP [₹]
Com'X510	Energy Gateway Server – EMS in a BOX	EBX510	52300
Link150	Protocol Converter	EGX150	30618

8.2 Ethernet – TCP/IP Protocol Meters & Accessories

Product	Description	Reference	Unit MRP [₹]
ION Products	ION 8800, ION 8650, ION 9000T, ION 9000, PM8000 with Ethernet		On Request
PM 5560	Two Ethernet ports with single IP, CI0.2S, Web dashboard	30003008D	61749
PM 5340	One Ethernet port, 2 Digital Inputs, 2 Digital Outputs, 2 Relays	30003007D	36118
PM 5320	One Ethernet port, 2 Digital Inputs, 2 Digital Outputs	30003005D	33664

Accessories for Power Monitoring NEW

Description	Reference	Unit MRP [₹]
Adaptor Plate 144X144 mm	30000089	96
ELF adaptor plate	30001808	58
DM52XX Tamper protection kit - Set of 36 nos in 01 KIT	METSEDM5240TK	1095
IP65 protection cover for PM5XXX, PM2XXX, NG+ and Hexa	METSEIP65OP96X96FD	On Request

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 11th, 2021

9. Specialized Small Form Factor Meters - ELF Series



9.1 ELF32xx Series - VAF, Power & Energy Meters

- > Accuracy C11.0, C10.5
- > Aux Supply - 80 to 270Vac
- > Size - 96X48mm
- > Parameters - VAF, W/VA/VAr/PF
 - a) ELF3259 - VAF meter
 - b) ELF3234 - W/VA/VAr/PF
 - c) ELF3234_3 - W/VA/VAr & PF

Product	Description	Reference	Unit MRP [₹]
ELF3234-3	ELF3234-3 C10.5	30000619	6835
ELF3234	ELF3234 C10.5	30000621	5850
ELF3259	ELF3259 C10.5	30000620	2936
ELF3234-3	ELF3234-3 C11.0	30000409	5460
ELF3234	ELF3234 C11.0	30000859	4678
ELF3259	ELF3259 C11.0	30000860	2342

10. Specialized Counter Energy Meters- Conzerv™ DM52xx



10.1 *Conzerv™ DM52xx

- > Accuracy C11.0, C10.5
- > Pulse output – for effective WAGES tracking on EMS systems
- > 3P4W & 3P3W wiring options

Product	Description	Unit MRP [₹]
30002666	DM5240 0.5 415V-415V 100-1A 240VAX	5325
30002707	DM5240 1.0 415V-415V 1-1A 240VAX	4533
30002622	DM5240 1.0 415V-415V 40-5A 240VAX	4490
30002506	DM5240 1.0 415-415V 100-5A 240AX	4490
30002507	DM5240 1.0 415-415V 200-5A 240AX	4490
30002626	DM5240 1.0 415V-415V 3200-5A 240VAX	4490
30002505	DM5240 1.0 415-415V 5-5A 240AX	4490
30002655	DM5240 1.0 415V-110V 5-5A 110VAX	4533
30002661	DM5240 1.0 415V-110V 100-5A 240VAX	4533

* For DM5240 the configurations of the quoted references here only shall be available for ordering

11. LCD Display Energy Meters & VAF+PF Meters



High durability, sleek LCD display energy & VAF+PF meters

11.1 EM1000 / EM1200 Series

- > Accuracy C10.5, C11.0
- > **Parameters** - KW, KWh & PF
- > **Pulse output** - for basic tracking on EMS systems
- > **RS 485** - for native integration into EMS

Product	Description	Reference	Unit MRP [₹]
EM1200	EM1200 C10.5 RS	30002572	4578
EM1000	EM1000 C10.5 POP	30002571	3929
EM1200	EM1200 C11.0 RS	30002565	3773
EM1000	EM1000 C11.0 POP	30002568	3108

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 11th, 2021



11.2 DM 6100 Series – VAF, PF Meters

- > Accuracy CI0.5, CI1.0
- > **DM6100** - VAF, PF meter
- > **DM6300** - VAF, PF meter with RS 485 port

Product	Description	Reference	Unit MRP [₹]
DM6300	DM6300 CI0.5 RS	30002570	3809
DM6100	DM6100 CI0.5	30002569	3006
DM6300	DM6300 CI1.0 RS	30002566	3627
DM6100	DM6100 CI1.0	30002567	2863

12. CE compliance - Volt/Amp/ frequency meter



CE
Compliant

12.1 EasyLogic™ DM3000 / DM1000

- > **CE compliance** as per latest IEC 61010-1
- > 50Hz or 60Hz
- > **AC or DC** control power
- > **LED indicators** for phase identification in 3-ph meters
- > **Plus all features** of Conzerv range DM3000 / DM1000

Product	Description	Reference	Unit MRP [₹]
DM3210	Three phase Voltmeter CI0.5	30002965	2663
DM3110	Three phase Ammeter CI0.5	30002964	2663
DM1210	Single phase Voltmeter CI0.5	30002962	1807
DM1110	Single phase Ammeter CI0.5	30002961	1807
DM1310	Frequency meter CI0.2	30002963	1375

13. Just the Basics - Voltage / Ampere / Frequency Meters



13.1 Conzerv™ DM3000 / DM1000

Accuracy

- > Volts & Amps - CI 0.5/CI1.0
- > Frequency - 0.2
- > True RMS values

Bright red LED Display

- > Full 4 Digits, 0.1% Resolution
- > 14mm height, 7 segment

User-friendly

- > Auto exit from setup
- > Elegant ergonomic design
- > Intuitive dual function key
- > Bright LED indicators - Kilo & Phase indications for measured value

Product	Description	Reference	Unit MRP [₹]
DM3210	Three phase Voltmeter CI0.5	30002462	2171
DM3110	Three phase Ammeter CI0.5	30002461	2171
DM3210	Three phase Voltmeter CI1.0	30002386	1735
DM3110	Three phase Ammeter CI1.0	30002385	1735
DM1210	Single phase Voltmeter CI0.5	30002460	1470
DM1110	Single phase Ammeter CI0.5	30002459	1470
DM1210	Single phase Voltmeter CI1.0	30002366	1092
DM1110	Single phase Ammeter CI1.0	30002365	1092
DM1310	Single phase Frequency CI0.2	30002367	1092

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 11th, 2021

Life Is On

Schneider
Electric

Schneider Electric India Pvt. Ltd.

Corporate Office: 9th Floor, DLF Building No. 10, Tower C, DLF Cyber City, Phase II, Gurugram 122002 Haryana
Tel.: ++91 124 6899000 Fax: ++91 124 4222036/037

Ahmedabad

Schneider Electric India (P) Ltd.
1506-1507, 15th Floor Shapth-5
Opp.Karnavati Club, SG Highway,
Ahmedabad, Gujarat - 380015
Tel.: 079-66826701

Coimbatore

Schneider Electric India (P) Ltd.
Hanudev Info Tech Park, 6th Floor
Unit No. Block-C, SF No. 558/2
Udalyampalayam Road, Nava India
Coimbatore-641028

Lucknow

Schneider Electric India (P) Ltd.
Summit, Plot No. TCG 3/3
6th Floor, 604A/B/C, Vibhuti Khand
Gomti Nagar, Lucknow
Uttar Pradesh - 226010
Tel.: 0522-3500334

Nashik

Schneider Electric India (P) Ltd.
401, 4th Floor, Rishi Raj Towers
Jehan Circle, Gangapur Road
Nashik- 422013
Tel.: 0253-2344333

Bengaluru

Schneider Electric India (P) Ltd.
No. 3/1, JP Techno Park
Mezzanine Floor, Millers Tank Bund
Road, Vasanth Nagar
Bengaluru - 560052
Tel.: 080-71481351

Hyderabad

Schneider Electric India (P) Ltd.
D.No. 1-8-271, # 401, Ashoka
Bhoopal Chambers, SP Road
Secunderabad - 500003
Tel.: 040-67219500

Ludhiana

Schneider Electric India (P) Ltd.
SCO 23, 2nd Floor,
Chandigarh Road, Sector 32
Ludhiana, Punjab-141010
Tel.: 0161- 5203011

New Delhi

Schneider Electric India (P) Ltd.
C-56, Mayapuri Industrial Area, Phase-2
New Delhi - 110064
Tel.: 011-61317400

Bhubaneswar

Schneider Electric India (P) Ltd.
Workloop Co-Working in the property
Office No. 316, Esplanade One Mall
Rasulgarh, Bhubaneswar - 751010

Indore

Schneider Electric India (P) Ltd.
219, Dhan Trident Building
Vijay Nagar, A.B.Road
Indore-452001

Mohali

Schneider Electric India (P) Ltd.
2nd Floor, Tower-A
Bestech Business Tower
Mega Information & Technology Park
Industrial Plot No.1, Phase IX
(Expansion), Mohali- 160059
Tel.: 0172-7198200

Pune

Schneider Electric India (P) Ltd.
Amar Caliber, CTS No 911, BMCC Road,
OFF F.C. Road, Deccan Gymkhana,
Shivaji Nagar, Pune - 411007
Tel.: 020-67492500

Chennai

Schneider Electric India (P) Ltd.
No: 29, 2nd Floor,
Bannari Amman Towers, B-Block
Dr. Radhakrishnan Road, Mylapore
Chennai - 600 004
Tel.:044-71912000

Jaipur

Schneider Electric India (P) Ltd.
Jaipur Business Centre 309
3rd Floor, Sangam Tower 190
Church Road, Jaipur-302001
Tel.: 0141-2374810

Mumbai

Schneider Electric India (P)(Ltd)
Marwah House, 2nd Floor
Krishanlal Marwah Marg
Andheri (East), Mumbai - 400072
Tel.: 022-62280000

Vadodara

Schneider Electric India (P) Ltd.
Notus IT Park, 10th Floor, Block-D
Sarabhai Campus, Vadiwadi
Vadodara, Gujarat - 390017

Cochin

Schneider Electric India (P) Ltd.
Alapatt Properties Private Limited
(Trade Name : Centre A)
Main Door Number : 66/4971
(Old Door Number: 40/6584-H)
7th Floor Alapatt Heritage Building
MG Road Kochi - 682035

Kolkata

Schneider Electric (I) Pvt.Ltd,
BP-4, Sector-V, Technopolis
3rd Floor, Salt Lake City
Kolkata- 700 091
Tel.: 033-66576400

Nagpur

Schneider Electric India (P) Ltd.
6, Vasant Vihar Complex
W.H.C Road, Shankar Nagar
Nagpur- 440010
Tel.: 0712-2558581

Vishakhapatnam

Schneider Electric India (P) Ltd.
D.N.10-1-43, 1st Floor
Ratnam's Business Centre,
Siripuram Fort, C.B.M.Compound
Vishakhapatnam - 530016
Tel.: 0891-6675500

Customer Care Centre

Monday-Saturday, 9 a.m. to 8 p.m.

Toll-free numbers: 1800 419 4272, 1800 103 0011

Email: customercare.in@schneider-electric.com

For more information, visit our website at: www.se.com/in

- All Prices are in Indian Rupees.
- Prices are subject to change without notice.
- Product evolution is a continuous process and Schneider Electric reserves the right to modify/withdraw any product at any time without prior notice.
- Prices charged will be as prevailing on the date of dispatch.
- Maximum Retail Price (MRP) is inclusive of all taxes.
- Tax incidence on invoices is basis applicable GST rates.
Invoice amount not to exceed MRP.

Distributor